
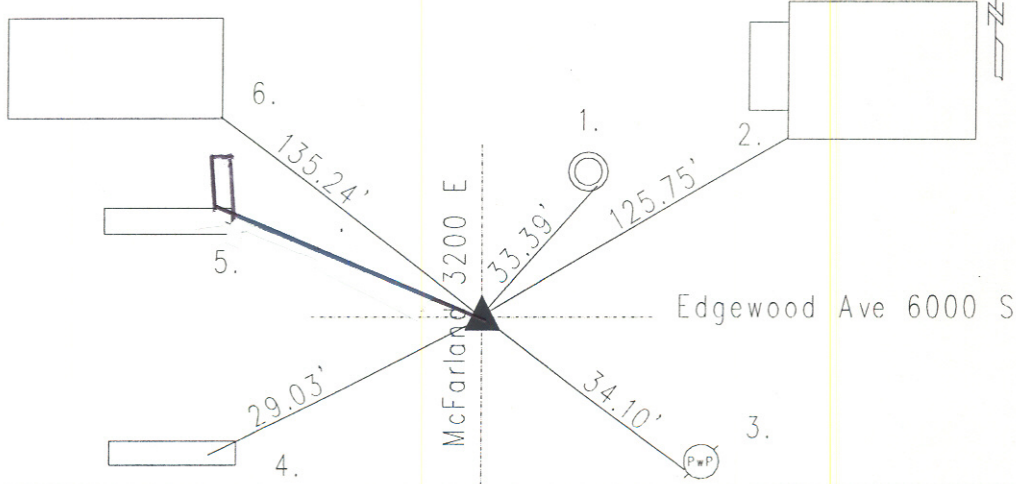


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 8 TOWNSHIP 14 RANGE 4
DATE: 10-26-02 8-17-07
PARTY CHIEF: Wilcoxon
CREW: _____
TYPE OF MARKER: Harrison FD
METHOD OF ESTABLISHMENT: County: 7-29-99

IN. S.P.C. E ZONE NAD '83
NAME: 14040802
N: 492067.2690(m)
E: 61878.9244(m)

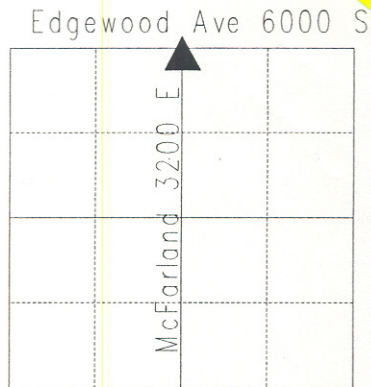

Corner originally set as a post in 1820 by John Hendricks with the following witnesses: 28" sugar bearing north 54 Degrees, thence west 45 links; and a 16" dogwood bearing south 20 degrees, thence east 6 links. (M.C. Atlas p. 9) A survey by H.B.Fatout on August 16, 1877 indicates a stone set with the following witnesses: 20" hickory bearing south 65.50 degrees, thence east 86.50 links; and a 22" elm bearing south 35.25 degrees, thence east 72 links; and a 10" maple tree bearing south 54 degrees, thence west 81.50 links. (PERRY LEGAL BOOK p. 12) A survey by Paul Julian on May 16, 1894 indicates a stone set with previous witnesses. (PERRY LEGAL BOOK p. 50) Corner referenced by MCS on 12/18/43 and called an iron pin. Corner referenced by Rednour on 12/28/71 and called a p.k nail. Corner referenced by Fortner on 6/30/75 and called a p.k. Nail. Corner referenced by Wilcoxon on 2/13/87 and called a R.R.spike over pipe. Corner referenced by Kiste on 7/13/92 and called a R.R. spike. Corner referenced by Kiste on 7/25/99 and called a R.R. spike. Corner excavated on 10/23/02 by Wilcoxon and a mag nail was found at surface. A R.R.spike was found under mag nail. Iron pin was dug out in previous excavation. A#205 cast iron Harrison monument was set in position as the corner.

14040802		
REF.	DISTANCE	DESCRIPTION
1.	33.39'	Cut 'x' SE-rim of telephone manhole
2.	125.75'	SW corner of garage at foundation
3.	34.10'	Mag nail w/brass washer SW PwP no# 12" up
4.	29.03'	Cut 'x' E-end of headwall
5.	26.97'	Inside of corner L-shaped hdwl
6.	135.24'	SE corner of house foundation